

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Masayuki TAMURA, Isao ABE, Yuji HAGIWARA

Application No.: US National Stage of PCT/JP1/00899

Filed: January 18, 2002

Docket No.: 111524

For: MOTOR WITH ROTATION DETECTING DEVICE

PRELIMINARY AMENDMENT

Director of the U.S. Patent and Trademark Office
Washington, D. C. 20231

Sir:

Please amend the above identified application as follows:

IN THE ABSTRACT:

Please replace the Abstract filed with the Abstract attached hereto.

IN THE SPECIFICATION:

Please replace the specification filed with the specification attached hereto.

IN THE CLAIMS:

Please replace claims 1-10 as follows:

1. (Amended) A motor with a rotation detecting device, comprising:

a rotary shaft;

a casing with a bottomed cylindrical part for rotatably containing said rotary shaft; and

a rotation detecting device which detects rotation of said rotary shaft, wherein the rotation detecting device is supported by a sensor holder, and the sensor holder is

disposed in the casing by incorporation from an incorporating direction to the cylindrical part for the rotary shaft.

2. (Amended) The motor with a rotation detecting device according to claim 1, further comprising a holder receiving part formed on the inner peripheral surface of the cylindrical part of the casing, and the sensor holder is incorporated in said holder receiving part in a state of temporary holding.

3. (Amended) The motor with a rotation detecting device according to claim 1, further comprising:

a sensor support part in which the rotation detecting device is incorporated and a terminal support part in which a connecting terminal thereof is incorporated, respectively formed in the sensor holder; and

a connecting opening part, enabling seeing the terminal support part from the outside, formed on the outer peripheral surface of the cylindrical part of the casing.

4. (Amended) The motor with a rotation detecting device according to claim 1, further comprising a brush unit in which a brush is incorporated is fixed on the opening side of the cylindrical part of the casing and the sensor holder in the casing is positioned and supported by the casing on the basis of fixing the brush unit to the casing.

5. (Amended) The motor with a rotation detecting device according to claim 3, further comprising a brush connecting terminal incorporated in a brush unit to extend onto and be supported by the terminal support part of the sensor holder, and can be seen from the connecting opening part of the casing.

6. (Amended) The motor with a rotation detecting device according to claim 3, further comprising at least one projecting piece part which projects toward the outside diameter side formed in the connecting opening part of the casing.

7. (Amended) The motor with a rotation detecting device according to claim 6, further comprising an external pull-out terminal unit which is electrically connected to each of connecting terminals of the rotation detecting device and the brush and is incorporated into the connecting opening part from the outside diameter side of the cylindrical part.

8. (Amended) The motor with a rotation detecting device according to claim 2, further comprising a terminal of a terminal support part that is supported in the state of projecting in the outside diameter direction of the cylindrical part, and a support piece part which supports the terminal support part of the sensor holder is formed on the holder receiving part on the bottom side of the cylindrical part, and an incorporation load at the time of incorporating the external pull-out terminal unit to the terminal support part is received by the support piece part.

9. (Amended) The motor with a rotation detecting device according to claim 6, further comprising at least one engaging claw formed on the incorporating tip side in the external pull-out terminal unit, and said engaging claw is engaged with a step-like engagement receiving part which is formed to the connecting opening part when the external pull-out terminal unit is incorporated in the connecting opening part.

10. (Amended) The motor with a rotation detecting device according to claim 9, wherein the engagement receiving part is formed integrally when the cylindrical part is molded.

Please add new claims 11-20 as follows:

--11. The motor with a rotation detecting device according to claim 2, further comprising:

a sensor support part in which the rotation detecting device is incorporated and a terminal support part in which a connecting terminal thereof is incorporated formed in the sensor holder; and

a connecting opening part, enabling seeing the terminal support part from the outside, formed on the peripheral surface of the cylindrical part of the casing.--

--12. The motor with a rotation detecting device according to claim 2, further comprising a brush unit in which a brush is incorporated is fixed on the opening side of the cylindrical part of the casing and the sensor holder in the casing is positioned and supported by the casing on the basis of fixing the brush unit to the casing.--

--13. The motor with a rotation detecting device according to claim 3, further comprising a brush unit in which a brush is incorporated is fixed on the opening side of the cylindrical part of the casing and the sensor holder in the casing is positioned and supported by the casing on the basis of fixing the brush unit to the casing.--

--14. The motor with a rotation detecting device according to claim 4, further comprising a brush connecting terminal incorporated in the brush unit to extend onto and be supported by the terminal support part of the sensor holder, and can be seen from the connecting opening part of the casing.--

--15. The motor with a rotation detecting device according to claim 5, further comprising at least one projecting piece part which projects toward the outside diameter side formed in the connecting opening part of the casing.--

--16. The motor with a rotation detecting device according to claim 3, wherein the terminal of the terminal support part is supported in the state of projecting in the outside diameter direction of the cylindrical part, and a support piece part which supports the terminal support part of the sensor holder is formed on the holder receiving part on the bottom side of the cylindrical part, and an incorporation load at the time of incorporating the external pull-out terminal unit to the terminal support part is received by the support piece part.--

--17. The motor with a rotation detecting device according to claim 5, wherein the terminal of the terminal support part is supported in the state of projecting in the outside diameter direction of the cylindrical part, and a support piece part which supports the terminal support part of the sensor holder is formed on the holder receiving part on the bottom side of the cylindrical part, and an incorporation load at the time of incorporating the external pull-out terminal unit to the terminal support part is received by the support piece part.--

--18. The motor with a rotation detecting device according to claim 6, wherein the terminal of the terminal support part is supported in the state of projecting in the outside diameter direction of the cylindrical part, and a support piece part on the channel back side which supports the terminal support part of the sensor holder is formed on the holder receiving part, and an incorporation load at the time of incorporating the external pull-out terminal unit to the terminal support part is received by the support piece part.--

--19. The motor with a rotation detecting device according to claim 7, further comprising at least one engaging claw formed on the incorporating tip side in the external pull-out terminal unit, and said engaging claw is engaged with a step-like engagement receiving part which is formed to the connecting opening part when the external pull-out terminal unit is incorporated in the connecting opening part.--

--20. The motor with a rotation detecting device according to claim 8, further comprising at least one engaging claw formed on the incorporating tip side in the external pull-out terminal unit, and said engaging claw is engaged with a step-like engagement receiving part which is formed to the connecting opening part when the external pull-out terminal unit is incorporated in the connecting opening part.--


REMARKS

Claims 1-20 are pending. By this Amendment, the specification, abstract and claims 1-10 are amended. In addition, claims 11-20 are added.

The attached Appendix includes a marked-up copy of the rewritten abstract (37 C.F.R. §1.121(b)(iii)), of the substitute specification (37 C.F.R. §1.125(b)(2)) and each claim (37 C.F.R. §1.121(c)(1)(ii)).

It is respectfully requested that the amendments be entered prior to taking the application up for examination. Should the Examiner have any questions, he is respectfully requested to contact the undersigned at the telephone number listed below.

Respectfully submitted,


James A. Oliff
Registration No. 27,075

Robert A. Miller
Registration No. 32,771

JAO:RAM/zmc

Attachments:

Substitute Abstract
Appendix
Request for Approval of Drawing Corrections
Marked-up Specification
Substitute Specification

Date: January 18, 2002

OLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400

DEPOSIT ACCOUNT USE AUTHORIZATION Please grant any extension necessary for entry; Charge any fee due to our Deposit Account No. 15-0461
--

ABSTRACT

A rotation detecting device which detects the rotational state of a rotary shaft, is structured to be a device in which the number of parts is small, and the incorporation is simple. The structure is such that a long holder receiving part is formed on the channel back side in an opening part of a motor shaft case body of a casing which contains a reduction mechanism part, and a sensor holder in which a hall device, the rotation detecting device, is incorporated, is slid in the longitudinal direction of the motor shaft, and is incorporated in the holder receiving part in the lightly pressed state, similarly to the incorporation of the motor shaft.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197
2198
2199
2200
2201
2202
2203
2204
2205
2206
2207
2208
2209
2210
2211
2212
2

APPENDIX

Changes to Abstract:

The following is a marked-up version of the amended Abstract:

~~When providing a~~ A rotation detecting device which detects the rotational state of a rotary shaft, it is ~~constructed~~ structured to be a device in which the number of parts is small, and the incorporation is simple. The ~~construction~~ structure is ~~made such that~~ a long holder receiving part (10) is formed on the channel back side in an opening part (7b) of a motor shaft case body (7) of a casing (6) which contains a reduction mechanism part, and a sensor holder (12) in which a hall device, (14) ~~to be~~ the rotation detecting device, is incorporated, is slid in the longitudinal direction of the motor shaft, and is incorporated in the holder receiving part (10) in the lightly pressed state, similarly to the incorporation of the motor shaft (4).

Changes to Specification:

Attached is a marked-up copy of the specification.

Changes to Claims:

Claims 11-20 are added.

The following are marked-up versions of the amended claims:

1. (Amended) A motor with a rotation detecting device, comprising:

_____-a rotary shaft;

_____-a casing with a bottomed cylindrical part for rotatably containing said rotary shaft; and

_____-a rotation detecting device which detects rotation of said rotary shaft, ~~characterized in that said~~ wherein the rotation detecting device is supported by a sensor holder, and ~~said the~~ sensor holder is disposed in the casing by incorporation from ~~the an~~ an incorporating direction to the cylindrical part ~~offor~~ the rotary shaft.

2. (Amended) The motor with a rotation detecting device according to claim 1, ~~characterized in that further comprising~~ a holder receiving part is formed on the inner peripheral surface of the cylindrical part of the casing, and the sensor holder is incorporated in said holder receiving part in ~~the a~~ state of temporary holding.

3. (Amended) The motor with a rotation detecting device according to claim 1-
or 2, ~~characterized in that further comprising:~~
_____ a sensor support part in which the rotation detecting device is incorporated and
a terminal support part in which a connecting terminal thereof is incorporated, respectively
~~are~~ formed in the sensor holder; and
_____ a connecting opening part, ~~for enabling~~ seeing the terminal support part from
the outside, is formed on the ~~outer~~ peripheral surface of the cylindrical part of the casing.

4. (Amended) The motor with a rotation detecting device according to claim 1,
~~2, or 3, characterized in that further comprising~~ a brush unit in which a brush is incorporated
is fixed on the opening side of the cylindrical part of the casing and the sensor holder in the
casing is positioned and supported by the casing on the basis of fixing ~~to the casing of the~~
brush unit to the casing.

5. (Amended) The motor with a rotation detecting device according to claim 3-
or 4, ~~characterized by being constructed such that further comprising~~ a brush connecting
terminal ~~which is incorporated in the~~ brush unit ~~is extended long to~~ to extend onto and
be supported by the terminal support part of the sensor holder, and ~~is can be~~ seen from the
connecting opening part of the casing.

6. (Amended) The motor with a rotation detecting device according to claim 3,
~~4, or 5, characterized in that further comprising~~ at least one projecting piece part which
projects toward the outside diameter side ~~is~~ formed in the connecting opening part of the
casing.

7. (Amended) The motor with a rotation detecting device according to claim 6, characterized in that further comprising an external pull-out terminal unit which is electrically connected to each of connecting terminals of the rotation detecting device and the brush and is incorporated into the connecting opening part from the outside diameter side of the cylindrical part.

8. (Amended) The motor with a rotation detecting device according to claim 2, ~~3, 5, 6, or 7, characterized by being constructed such that the~~ further comprising a terminal of the terminal support part that is supported in the state of projecting in the outside diameter direction of the cylindrical part, and a support piece part ~~on the channel back side which~~ supports the terminal support part of the sensor holder is formed on the holder receiving part on the bottom side of the cylindrical part, and an incorporation load at the time of incorporating the external pull-out terminal unit to the terminal support part is received by the support piece part.

9. (Amended) The motor with a rotation detecting device according to claim 6, ~~7, or 8, characterized by being constructed such that~~ further comprising at least one engaging claw ~~is formed on the incorporating tip side in the external pull-out terminal unit, and said~~ engaging claw is engaged with a step-like engagement receiving part which is formed to the connecting opening part when the external pull-out terminal unit is incorporated in the connecting opening part.

10. (Amended) The motor with a rotation detecting device according to claim 9, characterized in that wherein the engagement receiving part is formed integrally when the cylindrical part is molded.

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Masayuki TAMURA, Isao ABE, Yuji HAGIWARA

Application No.: US National Stage of PCT/JP1/00899

Filed: January 18, 2002

Docket No.: 111524

For: MOTOR WITH ROTATION DETECTING DEVICE

REQUEST FOR APPROVAL OF DRAWING CORRECTIONS

Director of the U.S. Patent and Trademark Office
Washington, D.C. 20231

Sir:

The Examiner is requested to review and approve the proposed corrections to Figures 10(A)-10(B), marked in red on the attached copy of such drawing figures.

Upon approval by the Examiner, and upon allowance of this application, the formal drawings will be corrected.

Respectfully submitted,



James A. Oliff

Registration No. 27,075

Robert A. Miller

Registration No. 32,771

JAO:RAM/zmc

Date: January 18, 2002

OLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400

Fig. 10(A)

RELATED ART





Fig. 10(B)

RELATED ART

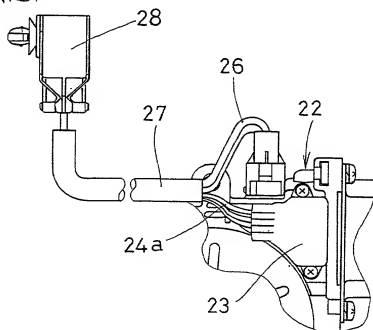

MOTOR WITH ROTATION DETECTING DEVICE

BACKGROUND OF THE INVENTION1. Field of Invention

[0001] The invention relates to the technical field of a motor with a rotation detecting device, which is used for electrical equipment mounted on a vehicle or the like.

2. Description of Related Art

[0002] Generally, in this type of motor, there is a rotation detecting device which detects the rotational amount of a rotary shaft of the motor for detecting the movement amount or the position of a movable member (actuator) acting on the basis of the driving of the motor. As such a motor, motors which are shown in JP-A-11-215773 and JP-A-11-215774 are proposed. In the case of these motors, as shown in Fig. 10 (A), an opening 22a is formed in the peripheral surface of the cylindrical part of a casing 22 where a reduction worm wheel and a rotary shaft worm forming part of the motor are contained. The structure is such that a rotation detecting device 24 is provided on the inside surface of a sensing unit 23 which is formed to close the above described opening 22a, and waterproofing of the rotation detecting device 24 or other members which are arranged in the interior of the casing 22 is achieved by putting a seal member between the peripheral part of the casing opening 22a and the sensing unit 23 to close the opening 22a.

[0003] However, with such a structure as the above described conventional one, the sensing unit 23 in which the rotation detecting device 24 is provided is inserted from the outside of the opening 22a, formed in the peripheral part of the casing 22, and is integrated by fixing means, such as, using screws 25. Therefore, not only the screwing work becomes necessary making the work troublesome but also incurs a risk that the screw 25 is loosened by an external force as the fixing screw 25 is exposed to the outside of the motor. Additionally, the problem that the above described water proof structure must be provided at the boundary part between the casing 22 and the sensing unit 23 is created.

[0004] On the other hand, when providing a rotation detecting device, the electrical connection for feeding electricity to the rotation detecting device is necessary. In the case of the conventional one, as shown in Fig. 10 (B), a lead wire 24a is pulled out of the rotation detecting device 24 and is integrated with a lead wire 26 which is separately pulled out for feeding a brush to form an extension harness 27. At the end part of the extension harness 27, a connecting male coupler 28 is provided, and to the male coupler 28, a female coupler which is pulled out from the external power source on the vehicle body side or the like is connected.

However, each extension harness 27 is required to have a different length depending on the position where the motor is provided. Therefore, it is necessary to prepare motors in which extension harnesses 27 of various kinds of specifications are provided. Additionally, there are such problems that the number of products becomes large making quality control troublesome, and causing a high cost.

[0005] Furthermore, in the case where such a motor is attached to the door of a vehicle or the like, horizontally mirror image casings 22 may be prepared, but the shape of the opening 22a formed in each casing 22 is not horizontally symmetrical. Therefore, there is a problem that a sensing unit 23 with a shape corresponding to each of these openings 22a must be prepared, which makes it difficult to use a common part. The problems to be solved by the invention exist in these points.

SUMMARY OF THE INVENTION

[0006] The invention is created in view of the situation, having an object of solving the problems discussed above, and it is a motor comprising a rotary shaft; a casing with a bottomed cylindrical part which rotatably contains the rotary shaft; and a rotation detecting device which detects the rotation of the rotary shaft, wherein the rotation detecting device is supported by a sensor holder, and the sensor holder is disposed in the casing by the incorporation (installation) from the incorporating direction to the cylindrical part of the rotary shaft. By doing so, the sensor holder is arranged to be housed in the casing, and it becomes unnecessary to provide a waterproof structure.

[0007] In this motor, it is possible that a holder receiving part is formed on the inner peripheral surface of the cylindrical part of the casing of the invention, and that a sensor holder is incorporated in the holder receiving part in a state of temporary holding, and a fixing means for the sensor holder, such as screws, becomes unnecessary.

[0008] Furthermore, in the motor, the sensor holder of the invention can be a holder, where a sensor support part in which the rotation detecting device is incorporated and a terminal support part in which a connecting terminal thereof is incorporated are formed, and a connecting opening part for seeing the terminal support part from the outside is formed in the outer peripheral surface of the cylindrical part of the casing.

[0009] Furthermore, in the motor, it is possible that, on the opening side of the cylindrical part of the casing of the invention, a brush unit in which a brush is incorporated is fixed, and that the sensor holder in the casing is positioned and supported by the casing on the basis of the fixing to the casing of the brush unit.

[0010] Furthermore, in the motor, the structure can be such that the brush connecting terminal incorporated in the brush unit of the invention extends onto the terminal support part of the sensor holder so as to be supported by the terminal support part, and to be seen from the connecting opening part of the casing.

[0011] Furthermore, in the motor, the connecting opening part of the casing of the invention can be a part where at least one projecting piece part which projects toward the outside diameter side is formed.

[0012] Furthermore, in the motor, an external pull-out terminal unit which is electrically connected to each of the connecting terminals of the rotation detecting device and the brush can be incorporated, in the connecting opening part of the invention, from the outside diameter side of the cylindrical part.

[0013] Furthermore, in the motor, the structure can be such that the terminal of the terminal support part of the invention is supported in the state of projecting in the outside diameter direction of the cylindrical part and, on the other hand, a support piece part, which supports the terminal support part of the sensor holder, is formed on the holder receiving part on the bottom side of the cylindrical part, and the incorporation load at the time of incorporating the external pull-out terminal unit to the terminal support part is received by the support piece part through the terminal support part. Thus, the incorporation load acting on the sensor holder to deform the sensor holder is avoided, and the accuracy of the rotation detection can be raised.

[0014] Furthermore, in the motor, the structure can be made such that to the external pull-out terminal unit of the invention, at least one engaging claw is formed on the incorporation tip side, and the engaging claw is engaged with the step-like engagement receiving part which is formed to the connecting opening part, when the external pull-out terminal unit is incorporated in the connecting opening part. By doing this, it becomes possible to set an engagement receiving part with which the engaging claw is engaged, without providing an opening which leads to the periphery of the projecting piece part, and the external pull-out terminal unit can be attached to the connecting opening part in a sealing state so that a water proof structure is provided, and the workability can be improved.

[0015] Furthermore, in this motor, the engagement receiving part of the invention is formed integrally when the cylindrical part is molded.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] The invention will be described with reference to the drawings, in which:
Fig. 1 is a partial cross sectional front view of a motor;

Fig. 2 is a partial cross sectional side view of the state where the motor part of the motor is removed;

Figs. 3 (A) and 3 (B) are a front view and a plan view of a casing, respectively;

Fig. 4 is a side view of the casing;

Figs. 5 (A), 5 (B), 5 (C), and 5 (D) are a plan view, a front view, and a side view of a sensor holder, and a plan view of the state where a base plate is attached, respectively;

Figs. 6 (A), 6 (B), and 6 (C) are a side view and a plan view of a brush unit, and the 6-6 cross sectional view of Fig. 6 (A), respectively;

Figs. 7 (A), 7 (B), 7 (C), and 7 (D) are a plan view, a partial cross sectional front view, a bottom view, and a partial cross sectional side view of a terminal unit, respectively;

Fig. 8 is a front cross sectional view showing the state where a sensor holder, a brush unit, and a terminal unit are incorporated in the casing;

Figs. 9 (A) and 9 (B) is a partially enlarged front cross sectional views explaining the incorporation of a sensor holder, a brush unit, and a terminal unit; and

Figs. 10 (A) and 10 (B) are a side cross sectional view and a partial front view explaining the rotation detecting device in a conventional motor, respectively.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0017] The embodiment of the invention will be described on the basis of the drawings of Fig. 1 to Fig. 9 (B).

[0018] In the drawings, reference numeral 1 denotes a motor (motor device) with a reduction mechanism and a rotation detecting mechanism. One end part of a motor shaft (rotary shaft) 4 is rotatably supported by a bearing unit including a thrust bearing 4f pressed into the motor shaft 4 and a radial metal bearing 4g pressed into a motor yoke 3, shaped like a cylinder, with a bottom which composes a motor part 2 of the motor 1. An armature core 4a is positioned at one end side of the motor part 2 and rotates integrally with the motor shaft 4 and a commutator 5 is positioned at the other end side of the motor part 2 and rotates integrally with the motor shaft 4. Both are attached to the motor shaft 4 in the motor yoke 3. Reference numeral 3a denotes a pair of permanent magnets which are fixed to the inside peripheral surface of the motor yoke 3.

[0019] Reference numeral 6 denotes a casing in which the reduction mechanism of the motor 1 is contained. The casing 6 is formed by molding a resin material and is provided integrally with a case body 7 and a gear case 9. The case body 7 is formed with a cylindrical part to rotatably support the other end part of the motor shaft 4 projecting from the motor yoke 3. Approximately half of the motor shaft 4 is contained in the cylindrical part of the

case body 7. The gear case body 9 is arranged at one side of the case body (corresponding to the casing of the invention) 7 and is where the reduction mechanism members, such as a worm wheel 8 that meshes with a worm 4b formed on the motor shaft 4, large and small gears (not shown in the figure), and an output shaft (actuator driving output shaft, not shown in the figure) are contained, and the case body 7 and the gear case body 9 are formed to be the casing 6 in a state of being connected at the meshing part of the worm 4b and worm wheel 8.

[0020] The case body 7 receives an end part of the motor shaft 4 away from the motor yoke 3 that is rotatably supported by a bearing unit including a thrust bearing 4c, a damper 4d, and a radial metal bearing 4e at the tube bottom part 7a. The approximate central part of the motor shaft 4 is rotatably supported by a radial metal bearing 4h which is pressed into the opening part 7b side of the case body 7. Consequently, the motor shaft 4 is set so that three positions along its axis are supported by the motor yoke 3 or the case body 7. The end side of the case body 7 into which the motor shaft 4 is inserted is a motor shaft incorporation opening part (hereafter, referred to as the opening part) 7b. In the inside tube surface on the opening part 7b side, a holder receiving part 10 of the invention is buried on the cylindrical bottom side (toward the left side in Figs. 1 and 8) of the case body 7 to divide that and the cylinder hole at the penetrating part of the motor shaft 4.

[0021] The following description will be given on the basis of the vertical and horizontal directional properties as shown in Figs. 2 and 4 in order to make the description understandable, but of course, the invention is not limited to these directional properties as the motor 1 may be oriented at any angle.

[0022] The holder receiving part 10 is formed to be a long space on the cylindrical bottom side of the case body 7, surrounded by a circular-arc-like piece part 10a (corresponding to the support piece part of the invention) which is positioned over the penetrating part of the motor shaft 4 of the case body 7 and where the under surface is formed like a circular arc to adjacently face to the motor shaft 4, the motor shaft passing therebetween; a pair of lower piece parts 10b located on the left and right sides 7c (as shown in Fig. A) of the case body 7 from both left and right end edge parts of the circular-arc-like piece part 10a; a pair of upper piece parts 10c which is formed at the upper side with a specified clearance from the lower piece parts 10b; and left and right piece parts 10d between the upper and lower piece parts 10c, 10b and are formed on left and right sides 7c of the case body 7. Between the upper piece parts 10c of the holder receiving part 10, a pair of through holes 10e are formed, which are shaped like Π , i.e., shaped as grooves. Moreover, the

circular-arc-like piece part 10a is cut off at the portion of the holder receiving part 10 which is positioned on the opening side of the cylindrical part of the case body 7, and on this side of the case body opening part 7b, a communicating part H where the holder receiving part 10 and the cylinder hole are communicated with each other is formed. Here, the circular-arc-like piece part 10a of the invention is formed to follow the upper part of the bearing part where the radial metal bearing 4h for supporting the motor shaft 4 is inserted. Then, the communicating part H is set to face to the fixing part of a sensor magnet 11 of the motor shaft 4 which is incorporated in the case body 7. The sensor magnet 11 is a ring-like magnet where the N-pole and S-pole are polarized by turns in the rotational direction, and is set to rotate integrally with the motor shaft 4.

[0023] On the upper surface of each lower piece part 10b of the holder receiving part 10, a rib 10f is formed, which projects toward the upside (inside of the holder receiving part 10). Moreover, on the cylindrical bottom side of the case body 7, a butting surface part 10g is formed, on the holder receiving part 10, that projects upward from the upper surface of the circular-arc-like piece part 10a.

[0024] Furthermore, at the upper surface part 7d (the other side of the case body 7, corresponding to the side on the opposite side of the gear case body 9) in the peripheral surface of the cylindrical part of the case body 7, a connecting opening part O (Figs. 2 and 3) to be the connecting part to the external power source is formed, which is described later. The connecting opening part O is open at the upside of the holder receiving part 10 and on the cylindrical bottom side of the case body 7, that is, the position where the circular-arc-like piece part 10a can be seen, and is formed by cutting off the upper piece part 10c of the holder receiving part 10. Consequently, the outside of the case body 7 and the holder receiving part 10 in the case body communicate with each other via the connecting opening part O. Moreover, the connecting opening part O is open approximately like a quadrangle, and a rectangular-tube-like projecting piece part (corresponding to the male coupler outer frame, which is described later) 7e is integrally formed from the opening edge part extending upwardly (Fig. 2).

[0025] Reference numeral 12 (Figs. 5(A) - 5(D)) denotes a sensor holder which is integrally molded from a resin material to be fitted to the holder receiving part 10. In the sensor holder 12, one half part which is positioned on the opening side of the cylindrical part in the state of being incorporated in the holder receiving part 10 composes the concave-channel-like sensor support part 12a. The sensor support part 12a is shaped so that both left and right side parts are fitted to the space which is surrounded by the upper and lower piece

parts 10c, 10b and left and right piece parts 10d of the holder receiving part 10, and at the horizontally central part of the bottom surface (under surface) composing a concave channel, a circular-arc-like concave part 12b is concavely provided to go around the sensor magnet 11 of the motor shaft 4. Moreover, formed to the sensor support part 12a are fixing claws 12c, which hold the base plate 13 between them from the positions above and below the base plate 13 to define a holding groove, so that the base plate 13 is supported in the state of having a specified clearance between that and the circular-arc-like concave part 12b. Then, at the under surface of the base plate 13, that is, at the surface facing to the circular-arc-like concave part 12b side of the base plate 13, are one pair of hall devices 14 (Fig. 8). The hall devices 14 correspond to the rotation detecting device of the invention and detect the rotation of the sensor magnet 11 are provided so as to stand horizontally in a line.

[0026] On the other hand, the other half part positioned on the cylindrical bottom side with respect to the sensor holder 12 composes the terminal support part 12d where two pairs of sensor terminals 14a for feeding electricity to the hall devices 14 are insert-molded. The terminal support part 12d includes a wider part 12e which has a horizontal width similar to that of the sensor support part 12a and a narrower part 12f which is formed on the cylindrical bottom side and has a width narrower than that of the wider part 12e. The under surface of the narrower part 12f and the under surface of the horizontally central part of the wider part 12e are formed between them and the sensor support part 12a via a step part 12g that is positioned higher than the surface of the circular-arc-like concave part 12b of the sensor support part 12a. Moreover, the upper surfaces of the narrower part 12f and the horizontally central part of the wider part 12e are positioned higher than the upper surface of the sensor support part 12a and, from the upper surface of the narrower part 12f, the external connecting side end parts 14b, that are one end parts of the one pair of (four in all) the sensor terminals (hall device terminals) 14a, are provided projecting upward and forming a double line at specified intervals. Furthermore, to the higher-positioned upper surface of the wider part 12e, a pair of terminal receiving parts 12j are formed as notches positioned horizontally aligned with the positions of the sensor terminals 14a, and the bent part 17c (Figs. 6(B) and 6(C)) of the brush terminal 17b, which is described later, is received the terminal receiving part 12j in the butting state. Furthermore, to the upper surfaces of both the left and right end parts of the wider part 12e, are ribs 12h which project upwardly.

[0027] The end part of base plate 13 (Fig. 5(D)), which is disposed in the sensor support part 12a on the cylindrical bottom side is extended on the terminal support part 12d side at both the left and right end parts, where connecting holes 13a are formed, and the other

end part 14c of each sensor terminal 14a is inserted into a corresponding connecting hole 13a and soldered to the connecting hole 13a, so that each sensor terminal 14a and hall device 14 are connected.

[0028] Furthermore, both the left and right side parts of the sensor holder wider part 12e are formed to have shapes following both the left and right side parts of the sensor support part 12a, and at the side part thereof, a guide convex part 12i is formed. On the other hand, at the left and right piece parts 10d of the holder receiving part 10, a guide concave part 10h (Fig. 4) which is concavely formed, respectively, and the guide convex part 12i is engaged with the guide concave part 10h to perform the positioning and the movement guidance of the sensor holder 12. That is, the sensor holder 12 is set to be incorporated in the following steps: the external connecting side end part 14b of the upward projecting sensor terminal 14a is inserted into the through hole 10e, and the guide convex part 12i of the terminal support part wider part 12e engages with the guide concave part 10h of the case body opening part 7b to perform positioning. In this state, by pushing in the shaft length direction of the motor shaft 4, similarly to the incorporation of the motor shaft 4, the sensor holder 12 is guided by the guide concave part 10h (keeping the attitude) and slides into the holder receiving part 10 on the cylindrical bottom side. Then, it is set that the sensor holder 12 is incorporated in a specified incorporation position of the holder receiving part 10, by taking the state where the step part 12g between the terminal support part 12d and the sensor support part 12a is butted against the opening side end surface of the circular-arc-like piece part 10a. In this incorporation process, both the left and right end parts of the wider part 12e of the terminal support part 12d are arranged to be lightly pressed into the holder receiving part 10, by means of the rib 10f projecting at the lower piece part 10b of the holder receiving part 10 and the rib 12h projecting at the upper surface of the wider part 12e of the sensor holder 12. Consequently, the sensor holder 12 is incorporated in the incorporating position in the state of temporary holding.

[0029] Then, by being positioned at the incorporating position, the terminal support part 12d of the sensor holder 12 is positioned at the upper side of the circular-arc-like piece part 10a of the holder receiving part. In this position, the upper side in the incorporating direction can come into contact with a terminal unit 19, and the terminal support part 12d is set to be positioned right under the connecting opening part O which is open in the case body 7. On the other hand, the sensor support part 12a is set to face to the communicating part H which is formed by cutting off the circular-arc-like piece part 10a of the holder receiving part. Consequently, the hall devices 14 of the sensor support part 12a are adjacently faced to the

sensor magnet 11 of the motor shaft 4 in the state of having the circular-arc-like concave part 12b of the sensor holder between them and the sensor magnet 11 of the motor shaft 4. Positioned such, the hall device 14 can detect the rotational state of the sensor magnet 11.

[0030] Furthermore, reference numeral 15 (Figs. 6(A) - 6(C)) denotes a brush unit which is incorporated in the case body 7 after incorporating the sensor holder 12. The brush unit 15 has a pair of base end parts each having of a plate spring 17a where a brush 17 is arranged at the tip. The brush end parts are fixed on one side of a disk-like brush stay 16 having a through hole 16a for the penetration of the motor shaft 4. The brush unit 15 is fixed by screwing the attaching parts 16b, formed on the outside diameter part of the brush stay 16, to the end surface of the opening part 7b of the case body 7 to be set in a fixed state. The brushes 17 then come into sliding contact with the commutator 5 of the motor shaft 4 in an elastically pressing state.

[0031] A pair of brush terminals 17b, which feed electricity to the brushes 17 and one is formed integrally with each plate spring 17a, are provided on the brush stay 16. The brush terminals 17b extend toward the cylindrical bottom side of the case body 7 when the brush unit 15 is incorporated into the case body 7, and each bent part 17c, the external connecting end part, is set to come into contact with one of the pair of notch-like terminal receiving parts 12j of the sensor holder 12 positioned at the previously set incorporating position in the butting state. Thus, when mounted, the brush stay attaching part 16b is butted against the end surface of the case body opening part 7b, and the normal incorporation can be performed. Therefore, in the case where the step part 12g of the sensor holder 12 is incorporated in the state of not butting against the opening side end surface of the holder receiving part circular-arc-like piece part 10a (in the state where the sensor holder 12 is not positioned at the specified incorporation position, and is positioned on the holder receiving part 10 at the cylindrical bottom side), it is set that the brush stay attaching part 16b and the end surface of the case body opening part 7b cannot come into contact with each other, even if the brush terminal bent part 17c comes into contact with the sensor holder notch part 12g. Consequently, the incorporation state of the sensor holder 12 can be confirmed by the incorporation state of the brush unit 15. And at this moment by further pushing in the brush unit 15 to make the brush stay attaching part 16b come into contact with the end surface of the case body opening part 7b, the positioning of the sensor holder 12 can be performed through the brush terminal bent part 17c.

[0032] In the state where the sensor holder 12 and the brush unit 15 are incorporated in the case body 7, from the connecting opening part O of the case body 7, the

sensor terminal external connecting part 14b, which projects from the sensor holder terminal support part 12d, and the brush terminal bent part 17c can be seen. On the other hand, a terminal unit (male coupler terminal part) 19 (Figs. 17(A) - 7(D)) connects the sensor terminal external connecting part 14b and brush terminal bent part 17c to the coupler (female coupler) 18 (Fig. 1) on the external power source side and is attached to the connecting opening part O. The terminal unit 19 is set to compose the male coupler by being inserted from the upside (from the outside), as shown in Fig. 1, into the rectangular-tube-like projecting piece part 7e forming in the connecting opening part O. The terminal unit 19 comprises a terminal holder 20, which is formed approximately like a rectangular pillar shape to be inserted into the projecting piece part (male coupler outer frame) 7e in the slip-off-stopping state and six middle terminals 21 are incorporated in a double line to be positioned at the part facing to the sensor terminal external connecting parts 14b and the brush terminal bent parts 17c that can be seen from the connecting opening part O. Furthermore, engaging claws 20a are formed on one pair of left and right incorporating tip sides which face to each other of the terminal holder 20 and are set to be engaged with the step-like engagement receiving part 7f formed in the connecting opening part O when the terminal unit 19 is incorporated in the connecting opening part O, so that the terminal unit 19 is surely fixed to the connecting opening part O. By the way, the engagement receiving part 7f is arranged to be integrally formed by being drawn from the incorporating direction of the brush unit 15 when molding the cylindrical part of the case body 7.

[0033] By inserting the terminal unit 19 into the connecting opening part O, the lower end part 21a of each middle terminal 21 and an associated one of the sensor terminal external connecting parts 14b and the brush terminal bent parts 17c are electrically connected. Consequently, the terminal unit 19 can be incorporated in the connecting part where the sensor terminal 14a and the brush terminal 17b are joined. By connecting the female coupler 18 on the vehicle body side to the male coupler, which includes the terminal unit 19 and the projecting piece part 7e, the electrical connection can simultaneously be performed to both the hall device 14 and the brush 17. Furthermore, it is arranged that when the terminal unit 19 is incorporated up to the specified position, the concave step 20b formed on the peripheral surface of the terminal holder 20 comes into contact with the convex step 7g formed to the inner peripheral surface of the projecting piece part 7e to regulate any further incorporation to the back side.

[0034] Here, the terminal unit 19 composes the male coupler in cooperation with the projecting piece part 7e. At the time of connection with the conventional type vehicle

body side female coupler 18, which is arranged on the vehicle body side, the seal is accomplished at the same time as the connection of the fellow couplers by the water proof means which is separately arranged, and the intrusion of water into the connecting opening part O at the lower part of the terminal holder 20 is prevented. Thus, a special water proof structure for the sensor holder terminal support part 12d is unnecessary. Furthermore, it is set that the sensor terminals 14a, which are disposed in the sensor holder 12 are insert-molded and have no looseness, but the brush terminals 17b which are disposed in the brush unit 15 are incorporated such that a little looseness is allowable, and functions as play when inserting and connecting the external power source coupler 18 to the terminal unit 19.

[0035] Furthermore, by incorporating the motor yoke 3, which pivots one end part of the motor shaft 4, to the casing 6 in which the sensor holder 12, brush unit 15, and terminal unit 19 are mounted, the incorporation of the motor 1 is completed. It should be noted that the motor yoke 3 is fixed by making the opening end part thereof butt against the attaching part outside diameter side of the brush unit 15 at the end surface of the case body opening part 7b and by screwing thereto.

[0036] In the case of the preferred embodiment of the invention structured as mentioned above, the rotation detection of the motor shaft 4 is performed by detecting the rotation of the sensor magnet 11 which rotates integrally with the motor shaft 4 by the hall device 14. Consequently, it is possible to detect the movement amount or the position of the movable member which acts on the basis the output shaft practicing the output through the reduction mechanism. Then, in this case, the hall device 14 is incorporated in the sensor holder 12, and the sensor holder 12 is arranged in the inside of the case body 7, by being incorporated toward the tube bottom side (channel back side) from the opening part 7b, which is the incorporation direction of the motor shaft 4 to the holder receiving part 10 formed to the case body 7, and it is unnecessary to plan a special water proof structure. Furthermore, in this case, the sensor holder 12 is incorporated in the state of being lightly pressed into the holder receiving part 10, and therefore, that can temporarily be held in the case body 7 by performing the incorporation work, and it is unnecessary to separately use fixing means. As a result, the attachment work can be simplified.

[0037] On the other hand, in the case of the incorporation to the connecting opening part O of the terminal unit 19, it is surely fixed by engaging the engaging claw 20, which is formed on the incorporating tip side of the terminal holder 20 with the step-like engagement receiving part 7f which is formed in the connecting opening part O, and the water proof structure can be provided only by engaging and attaching the engaging claw 20 to the

engagement receiving part 7f. In the meantime, the incorporation workability can also be improved, which is different from the case in which an engaging hole is pierced on the case side and an engaging claw on the terminal unit side is engaged with the engaging hole as shown in the prior art.

[0038] Furthermore, the engagement receiving part 7f is set to be integrally formed by being drawn from the incorporating direction of the brush unit 15 when the cylindrical part of the case body 7 is molded. Thus, the number of parts can be reduced.

[0039] Furthermore in this embodiment, the terminal support part 12d, which is formed to the sensor holder 12, faces the connecting opening part O, which is formed in the tube peripheral surface of the case body 7, and the structure is made such that the brush terminal bent part 17c of the brush unit 15 is also provided to the terminal support part 12d in addition to the sensor terminal external connecting part 14b. Therefore, it is possible to integrate the sensor terminal external connecting part 14b and the brush terminal bent part 17c by inserting the terminal unit 19 into the connecting opening part O. Further, by connecting the coupler 18 on the external power source side to the terminal unit 19, the electrical connection can simultaneously be performed to both the hall devices 14 and the brushes 17. As a result, it becomes unnecessary to make a structure where the lead wires, each of which is separately pulled out, are collected into the extension harness like the conventional one using lead wires, and the number of parts can be reduced. In terms of the cost, a low price can also be achieved and, in addition, the automatic incorporation also makes it possible to achieve the improvement in the workability.

[0040] Furthermore, in this embodiment, even if the sensor holder 12 is incorporated in the state where it does not reach the channel depth previously set to the holder receiving part 10 and has a positional deviation, the brush terminal bent part 17c of the brush unit 15 acts to press the sensor holder 12 to the specified position by incorporating the brush unit 15, and the sensor holder 12 is properly positioned. As a result, the bad incorporation is eliminated and the dispersion in product quality is reduced.

[0041] Furthermore, in this case, the circular-arc-like piece part 10a is formed on the holder receiving part 10 on the cylindrical bottom side and, when the sensor holder 12 is incorporated in the holder receiving part 10, the terminal support part 12d is positioned on the upside of the circular-arc-like piece part 10a, that is, the upper side in the incorporating direction of the terminal unit 19. In this state, the terminal unit 19 is incorporated in the terminal support part 12d and, therefore, the load in the incorporating direction, which is produced at the time of incorporation, is received by the circular-arc-like piece part 10a

which comes into contact with the terminal support part 12d, and it does not directly act on the terminal support part 12d. As a result, it avoids the incorporating load acting on not only the sensor holder 12 but also the base plate 13, and the accuracy of the rotation detection can be raised.

[0042] Furthermore, in this case, even if the motor 1 is formed to have a horizontally mirror image structure of the motor 1, the shape of the engagement receiving part 10 needs not be made a horizontally mirror image. Therefore, common parts can be used and, therefore, it becomes possible to deal with the sensor holder 12 only by forming one kind. The common member can be used to achieve an improvement in quality control and to achieve a low cost.

[0043] Furthermore, in the case of the embodiment, it is also possible to construct a motor with a specification which requires no position detecting mechanism of the motor, only by incorporating a brush unit 15 in the casing 6 without incorporating a sensor holder 12 therein, and it becomes possible to use the common member.

[0044] Thus, in the case of the invention, by doing this, in a motor with a rotation detecting device, the sensor holder composing the rotation detecting device is contained in the case body by being incorporated from the incorporating direction of the rotary shaft, and on the other hand, the connection between the external pull-out terminal unit and the connecting opening part is performed by engaging the engaging claw formed on the terminal holder, with the step-like engagement receiving part formed on the connecting opening part. Therefore, a simple structure is realized, and the number of parts is reduced in addition to a water proof structure being provided.

[0045] Furthermore, because the incorporating load which is produced when incorporating the external pull-out terminal unit into the sensor holder is received by the circular-arc-like piece part of the holder receiving part, it is avoided that the incorporating load acts directly on the sensor holder to deform the sensor holder, which enables providing a rotation detecting device with a high accuracy.

~~DESCRIPTION~~

MOTOR WITH ROTATION DETECTING DEVICE

Background of the Invention

1. Field of the Green Work

[0001] The present invention relates to the technical field of a motor with a rotation

~~Background Art~~

Description of Related Art

Qinghai
Contract

Types of motor

[0002] Generally, in this kind of motors, there is a motor with a rotation detecting which detects the rotational amount of a rotary shaft of the motor for detecting the amount or the position of a movable member (actuator) acting on the basis of the of the motor. As such a motor, motors which are shown in JP-A-11-215773 and 1-215774 are proposed. In the case of these motors, as shown in Fig. 10 (A), an g 22a is formed in the peripheral surface of the cylindrical part of a casing 22 where a on worm wheel and a rotary shaft worm forming part of the motor are contained. The re is made such that a rotation detecting device 24 is provided on the inside surface of ng unit 23 which is formed to close the above described opening 22a, and the water- if the rotation detecting device 24 or other members which are arranged in the interior casing 22 is achieved by putting a seal member between the peripheral part of the opening 22a and the sensing unit 23 to close the opening 22a.

[0003] However, with such a structure as the above described conventional one, the

sensing unit 23 in which the rotation detecting device 24 is provided is ^{inserted} put from the outside to the opening 22a formed in the peripheral part of the casing 22, and ~~this one~~ is integrated by ^{Such a} ~~fixing means~~ ^{screw} using a screw 25. Therefore, not only the screwing work becomes necessary ^{making} ~~to make~~ the work troublesome but also ^{weave} ~~such a~~ risk that the screw 25 is loosened by an external force ^{as} ~~since~~ the fixing screw 25 is exposed to the outside of the motor is ^{supposed} ~~supposed~~ and additionally, ^{the} ~~such a~~ problem that the above described water proof structure must be provided at the boundary part between the casing 22 and the sensing unit 23 is ^{created} ~~left~~.

[0004] On the other hand, when providing a rotation detecting device, the electrical connection for feeding electricity to the rotation detecting device is necessary. In the case of the conventional one, as shown in Fig. 10 (B), a lead wire 24a is pulled out of the rotation detecting device 24 and is integrated with a lead wire 26 which is separately pulled out for feeding a brush ~~to form~~ and an extension harness 27 ~~is formed~~. At the end part of the extension harness 27, a connecting male coupler 28 is provided, and to the male coupler 28, a female coupler which is pulled out ~~from~~ the external power source on the vehicle body side or the like is connected. However, each extension harness 27 is required to have a different length depending on the position where the motor is provided. Therefore, it is necessary to prepare

motors in which extension harnesses 27 of various kinds of specifications are provided. Additionally, there are such ^{problems} that the number of products becomes large ^{making} ~~the quality control troublesome, and that a high cost is caused.~~ ^{causing}

[0005] Furthermore, in the case where such a motor is attached to the door of a vehicle or the like, horizontally mirror image casings 22 may be prepared, but the shape of the opening 22a formed in each casing 22 is not horizontally symmetrical. Therefore, there is ~~such~~ a problem that a sensing unit 23 with a shape corresponding to each of these openings 22a must be prepared ~~respectively~~, which makes it difficult to use a common part. The problems to be solved by the ~~present~~ invention exist in these points.

Disclosure of the Invention

SUMMARY OF THE INVENTION
[0006] The ~~present~~ invention is created in view of the situation, having an object of solving ~~these~~ ^{the discussed above} problems, and it is a motor comprising a rotary shaft; a casing with a ^{bottomed} cylindrical part which rotatably contains the rotary shaft; and a rotation detecting device which detects the rotation of the rotary shaft, ^{wherein} ~~characterized in that~~ the rotation detecting device is supported by a sensor holder, and the sensor holder is disposed in the casing by the incorporation (installation) from the incorporating direction to the cylindrical part of the rotary shaft.

~~[0007] Then,~~ ^{so} by doing ~~this~~, the sensor holder is arranged to be housed in the casing, and it becomes unnecessary to provide a waterproof structure.

[0008] In this motor, it is possible that a holder receiving part is formed on the inner peripheral surface of the cylindrical part of the casing of the ~~present~~ invention, and that a sensor holder is incorporated in the holder receiving part in a state of temporary holding, and the fixing means ^{for} of the sensor holder such as screwing becomes unnecessary.

[0009] Furthermore, in this motor, the sensor holder of the ~~present~~ invention can be a holder, where a sensor support part in which the rotation detecting device is incorporated and a terminal support part in which a connecting terminal thereof is incorporated are formed, and a connecting opening part for seeing the terminal support part from the outside is formed in the peripheral surface of the cylindrical part of the casing.

[0010] Furthermore, in this motor, it is possible that on the opening side of the cylindrical part of the casing of the ~~present~~ invention, a brush unit in which a brush is incorporated is fixed, and that the sensor holder in the casing is positioned and supported by the casing on the basis of the fixing to the casing of the brush unit.

[0011] Furthermore, in this motor, the ^{structure} ~~construction~~ can be made such that the brush connecting terminal incorporated in the brush unit of the ~~present~~ invention is extended ^{into the terminal support part of the sensor holder} long to

be supported by the terminal support part of the sensor holder, and to be seen from the connecting opening part of the casing.

[0012] Furthermore, in this motor, the connecting opening part of the casing of the ~~present~~ invention can be a part where at least one projecting piece part which projects toward the outside diameter side is formed.

[0013] Furthermore, in this motor, an external pull-out terminal unit which is electrically connected to each of the connecting terminals of the rotation detecting device and the brush can be incorporated in the connecting opening part of the ~~present~~ invention, from the outside diameter side of the cylindrical part.

[0014] Furthermore, in this motor, the ~~construction~~ ^{structure} can be made such that the terminal of the terminal support part of the ~~present~~ invention is supported in the state of projecting in the outside diameter direction of the cylindrical part, and on the other hand, a support piece part on the channel back side which supports the terminal support part of the sensor holder is formed ^{on the bottom side of the cylindrical part} to the holder receiving part, and the incorporation load at the time of incorporating the external pull-out terminal unit to the terminal support part is received by the support piece part through the terminal support part, ^{thus,} and it is avoided for the incorporation load to ^{act on} the sensor holder to deform the sensor holder, and the accuracy of the rotation detection can be raised.

[0015] Furthermore, in this motor, the ~~construction~~ ^{structure} can be made such that to the external pull-out terminal unit of the ~~present~~ invention, at least one engaging claw is formed on the incorporation tip side, and the engaging claw is engaged with the step-like engagement receiving part which is formed to the connecting opening part, when the external pull-out terminal unit is incorporated in the connecting opening part. By doing this, it becomes possible to set an engagement receiving part with which the engaging claw is engaged, without providing an opening which leads to the periphery of the projecting piece part, and the external pull-out terminal unit can be attached to the connecting opening part in a sealing state ^{rather} and a water proof structure ^{can be} provided, and the workability can be improved.

[0016] Furthermore, in this motor, the engagement receiving part of the ~~present~~ invention is formed integrally when the cylindrical part is molded.

Brief Description of the Drawings

[0017] Fig. 1 is a partial ~~cross~~ ^{structure} sectional front view of a motor;

Fig. 2 is a partial ~~cross~~ ^{space} sectional side view of the state where the motor part of the motor is removed;

Figs. 3 (A) and 3(B) are a front view and a plan view of a casing, respectively;

The invention will be described with reference to the drawings, in which:

Fig. 4 is a side view of the casing;

Figs. 5 (A), 5 (B), 5 (C), and 5 (D) are a plan view, a front view, and a side view of a sensor holder, and a plan view of the state where a base plate is attached, respectively;

6, 6 Figs. 6 (A), 6 (B), and 6 (C) are a side view and a plan view of a brush unit, and the cross sectional view of Fig. 6 (A), respectively;

Figs. 7 (A), 7 (B), 7 (C), and 7 (D) are a plan view, a partial cross sectional front view, a bottom view, and a partial cross sectional side view of a terminal unit, respectively;

Fig. 8 is a front cross sectional view ^{showing} explaining the state where a sensor holder, a brush unit, and a terminal unit are incorporated in the casing;

Fig. 9 is a partially enlarged front cross sectional view ^{showing} explaining the relation of incorporation of a sensor holder, a brush unit, and a terminal unit; and

Figs. 10 (A) and 10 (B) are a side cross sectional view and a partial front view explaining the rotation detecting device in the conventional ^{motor} embodiment, respectively.

~~Best Mode for Carrying out the Invention~~ Description of Preferred Embodiment

[0018] The embodiments of the ~~present~~ ⁽⁵⁾ invention will be described on the basis of the drawings of Fig. 1 to Fig. 9.

[0019] In the drawings, reference numeral 1 denotes a motor (motor device) with a reduction mechanism and a rotation detecting mechanism. One end part of a motor shaft (rotary shaft) 4 is rotatably supported by a bearing unit including a thrust bearing 4f pressed into the motor shaft 4 and a radial metal bearing 4g pressed into the motor yoke 3 in a motor yoke 3, shaped like a cylinder with a bottom which composes a motor part 2 of the motor 1. An armature core 4a which is positioned at one end side and rotates integrally with the motor shaft 4, and a commutator 5 which is positioned at the other end side and rotates integrally with the motor shaft 4, are attached to the motor shaft 4 in the motor yoke 3. Reference numeral 3a denotes a pair of permanent magnets which are fixed to the inside peripheral surface of the motor yoke 3.

[0020] Reference numeral 6 denotes a casing in which the reduction mechanism of the motor 1 is contained, and the casing 6 is formed by molding a resin material, and a gear case, the case body 7 is provided integrally with a case body 7, which is formed with a cylindrical part to rotatably

Support pivot the other end part of the motor shaft 4 projecting from the motor yoke 3, and where approximately half of the motor shaft 4 is contained, and a gear case body 9 which is arranged at one side of the case body (corresponding to the casing of the present invention) 7 and where the reduction mechanism members such as a worm wheel 8 to be meshed with a worm 4b formed on the other end side of the motor shaft 4, large and small gears (not shown

and the case body 7 and the gear case body 9 are formed to be the casing 6 in the figure), and an output shaft (actuator driving output shaft, not shown in the figure) are contained in the state of being connected at the meshing part of the worm 4b and worm wheel 8.

[0021] The case body 7 is formed like a rectangular tube with a bottom, and the other end part of the motor shaft 4 is rotatably pivoted by a bearing unit including a thrust bearing 4c, a damper 4d, and a radial metal bearing 4e at the tube bottom part 7a on the other

end side. The horizontally approximately central part of the motor shaft 4 is rotatably pivoted by a radial metal bearing 4h which is pressed into the opening part 7b side of the case body

7. Consequently, the motor shaft 4 is set so that three positions along its axis in all in the horizontal direction are supported by the motor yoke 3 or the case body 7. One end side of the case body 7 from which the motor shaft 4 is inserted is incorporated becomes a motor shaft incorporation opening part (hereafter, referred to as an opening part) 7b. In the inside tube surface on the

opening part 7b side, the holder receiving part 10 of the present invention is buried on the cylindrical bottom side (toward the left side in Figs. 1 and 2) of the case body 7 channel back side to divide that and the cylinder hole at the penetrating part of the motor shaft 4.

[0022] Here, the following description will be given on the basis of the vertical and horizontal directional properties as shown in Fig. 2 and Fig. 4 in order to make the description understandable, but of course, the present invention is not limited to these directional properties. as the motor 1 may be oriented at any angle

[0023] The holder receiving part 10 is formed to be a long space on the cylindrical bottom back side, surrounded by a circular-arc-like piece part 10a (corresponding to the support piece part of the present invention) which is positioned over the penetrating part of the motor shaft 4 of the case body 7 and where the under surface is formed like a circular arc to adjacently face to the motor shaft 4; a pair of lower piece parts 10b which lead to the left and right sides 7c of the case body 7 from both left and right end edge parts of the

circular-arc-like piece part 10a; a pair of upper piece parts 10c which is formed at the upper side with a specified clearance for the lower piece parts 10b; and left and right piece parts 10d between which connect the upper and lower piece parts 10c, 10b and are formed on left and right sides 7c of the case body 7. Between the upper piece parts 10c of the holder receiving part 10, a pair of through holes 10e are formed, which are shaped like Π . Moreover, the

circular-arc-like piece part 10a of the channel this side part of the holder receiving part 10 is cut off, and on this side of the case body opening part 7b, a connecting part 11 where the holder receiving part 10 and the cylinder hole are communicated, each other is formed. Here, the circular-arc-like piece part 10a of the present embodiment is formed following the upper part

at the portion of the holder receiving part 10 which is positioned on the opening side of the cylindrical part of the case body 7

of the bearing part where the radial metal bearing 4h for ^{supporting} pivoting the motor shaft 4 is inserted. Then, the ~~connecting~~ ^{communicating} part H is set to face to the fixing part of a sensor magnet 11 of the motor shaft 4 which is incorporated in the case body 7. ~~By the way,~~ ^{the} the sensor magnet 11 is a ring-like magnet where the N-pole and S-pole are polarized by turns in the rotational direction, and is set to rotate integrally with the motor shaft 4.

[0024] On the upper surface of the ^{each} lower piece part 10b of the holder receiving part 10, a rib 10f is formed, which projects toward the upside (inside of the holder receiving part 10). Moreover, on the ~~channel back side of the holder receiving part 10~~ ^{cylindrical bottom side of the case body}, a butting surface part 10g is formed ~~in the state of projecting upward from the upper surface of the circular-arc-like piece part 10a.~~ ^{that a} ~~on the holder receiving part 10.~~

[0025] Furthermore, at the upper surface part 7d (the other side of the case body 7, corresponding to the side on the opposite side of the gear case body 9 ~~forming part~~) in the ^{and 3} peripheral surface of the cylindrical part of the case body 7, a connecting opening part O ^(Fig. 2) to be the connecting part to the external power source is formed, which is described later. ~~This~~ ^{connecting opening part O} is open at the upside ~~on the channel back side of the holder receiving part 10~~ ^{and on the cylindrical bottom side of the case body}, that is, the position where the circular-arc-like piece part 10a can be met, and is formed by cutting off the upper piece part 10c of the holder receiving part 10.

Consequently, the ~~outside~~ ^{with} of the case body 7 and the holder receiving part 10 in the case body ~~are~~ ^{are} communicated ~~each other~~ ^{each other} via the connecting opening part O. Moreover, the connecting opening part O is open approximately like a quadrangle, and a rectangular-tube-like projecting piece part (corresponding to the male coupler outer frame, which is described later) 7e is integrally formed from the opening edge part ~~toward the upside.~~ ^{extending upwards (Fig. 2)}

[0026] Reference numeral 12 ^{(Fig. 3(A)-3(B))} denotes a sensor holder which is integrally molded from a resin material to be fitted to the holder receiving part 10, ~~and in the sensor holder 12,~~ ^{opening side of the cylindrical part} one half part which is positioned on the ~~channel back side~~ ^{part} in the state of being incorporated in the holder receiving part 10 composes the concave-channel-like sensor support part 12a. The sensor support part 12a is shaped so that both left and right side parts are fitted to the space which is surrounded by the upper and lower piece parts 10c, 10b and left and right piece parts 10d of the holder receiving part 10, and at the horizontally central part of the bottom surface (under surface) composing a concave channel, a circular-arc-like concave part 12b is concavely provided to go around the sensor magnet 11 of the motor shaft 4. Moreover, ^{formed} to the sensor support part 12a ^{and} fixing claws 12c ^{are formed}, which hold the base plate 13. ^{positions above and below the base plate 13 to define a holding groove} between them from the upward and downward, so that the base plate 13 is supported in the state of having a specified clearance between that and the circular-arc-like concave part 12b.

Then, at the under surface of the base plate 13, that is, at the surface facing to the (Fig. 8). The hall devices 14 are circular-arc-like concave part 12b side of the base plate 13, ^{are} one pair of hall devices 14, which correspond to the rotation detecting device of the present invention and detect the rotation of the sensor magnet 11 are provided in the state of standing horizontally in a line, ^{on the cylindrical bottom} ~~on the channel back side of~~ ^{with respect to}

[0027] On the other hand, the other half part positioned on the ^{cylindrical bottom} ~~channel back side of~~ the sensor holder 12 composes the terminal support part 12d where two pairs of sensor terminals 14a for feeding electricity to the hall devices 14 are insert-molded. The terminal support part 12d includes a wider part 12e which has a horizontal width similar to that of the sensor support part 12a and a narrower part 12f which is formed on the ^{cylindrical bottom} ~~channel back side and~~ has a width narrower than that of the wider part 12e, and the under surface of the narrower part 12f and the under surface of the horizontally central part of the wider part 12e are formed between them and the sensor support part 12a via a step part 12g to be positioned higher than the surface of the circular-arc-like concave part 12b of the sensor support part 12a. Moreover, the upper surfaces of the narrower part 12f and the horizontally central part of the wider part 12e ~~following this are formed to be positioned~~ ^{the} higher than the upper surface of the sensor support part 12a, and from the upper surface of ~~this~~ ^{the} narrower part 12f, the external connecting side end parts 14b that are one end parts of the one pair of (four in all) sensor terminals (hall device terminals) 14a are provided projecting upward and forming a double line at specified intervals. Furthermore, to the higher-positioned upper surface of the wider part 12e, ~~one pair of terminal receiving parts 12j are formed like a notch to be positioned~~ ^{aligned with the} horizontally ~~equal to the arranging position of the sensor terminal 14a, and it is set that the bent part 17c of the brush terminal 17b which is described later is disposed to the terminal receiving part 12j in the butting state.~~ ^(Fig. 6B and 6C)) Furthermore, to the upper surfaces of both the left and right end parts of the wider part 12e, ~~ribs 12h which project upward are formed.~~ ^{are} [0028] ~~By the way, the channel back side end part of the base plate 13 which is disposed to the sensor support part 12a is extended on the terminal support part 12d side at both the left and right end parts, where a connecting hole 13a is formed, and it is set that the other end part 14c of each sensor terminal 14a is inserted and soldered to the connecting hole 13a, so that each sensor terminal 14a and hall device 14 are connected.~~ ^{on the cylindrical bottom part} ~~is extended on the terminal support part 12d side at both the left and right end parts, where a connecting hole 13a is formed, and it is set that the other end part 14c of each sensor terminal 14a is inserted and soldered to the connecting hole 13a, so that each sensor terminal 14a and hall device 14 are connected.~~ ^(Fig. 5D)) ~~is extended on the terminal support part 12d side at both the left and right end parts, where a connecting hole 13a is formed, and it is set that the other end part 14c of each sensor terminal 14a is inserted and soldered to the connecting hole 13a, so that each sensor terminal 14a and hall device 14 are connected.~~ ^{is extended on the terminal support part 12d side at both the left and right end parts, where a connecting hole 13a is formed, and it is set that the other end part 14c of each sensor terminal 14a is inserted and soldered to the connecting hole 13a, so that each sensor terminal 14a and hall device 14 are connected. ^{is extended on the terminal support part 12d side at both the left and right end parts, where a connecting hole 13a is formed, and it is set that the other end part 14c of each sensor terminal 14a is inserted and soldered to the connecting hole 13a, so that each sensor terminal 14a and hall device 14 are connected. ^{is extended on the terminal support part 12d side at both the left and right end parts, where a connecting hole 13a is formed, and it is set that the other end part 14c of each sensor terminal 14a is inserted and soldered to the connecting hole 13a, so that each sensor terminal 14a and hall device 14 are connected.}}}

[0029] Furthermore, both the left and right side parts of the sensor holder wider part 12e are formed to have shapes following both the left and right side parts of the sensor support part 12a, and at the side part thereof, a guide convex part 12i is formed. On the other hand, at the left and right piece parts 10d of the holder receiving part 10, a guide concave part 10h ^(Fig. 4) which is concavely ^{formed} ~~provided on the outside diameter side is formed,~~

respectively, and ~~it is set that~~ the guide convex part 12i is engaged with the guide concave part 10h to perform the positioning and the movement guide ^{and} of the sensor holder 12. That is, the sensor holder 12 is set to be incorporated in the following steps; the external connecting side end part 14b of the upward projecting sensor terminal 14a is inserted into the through hole 10e, and the guide convex part 12i of the terminal support part wider part 12e is ~~is put on~~ ^{is performed} in the attitude of being engaged with the guide concave part 10h of the case body opening part 7b) ~~and the positioning is performed, and~~ ^{is performed} in this state, by ~~being pushed in~~ ^{is pushed in} the shaft length direction of the motor shaft 4, similarly to the incorporation of the motor shaft 4, the sensor holder 12 is guided by the guide concave part 10h (keeping the attitude) and is incorporated ~~in the state of sliding to the channel back side of the holder receiving part 10.~~ ^{on the cylindrical bottom side} Then, it is set that the sensor holder 12 is incorporated in a specified incorporation position of the holder receiving part 10, by taking the state where the step part 12g between the terminal support part 12d and the sensor support part 12a is butted against the opening side end surface of the circular-arc-like piece part 10a. In this incorporation process, both the left and right end parts of the wider part 12e of the terminal support part 12d are arranged to be incorporated in ~~the state of being~~ lightly pressed into the holder receiving part 10, by means of the rib 10f projecting at the lower piece part 10b of the holder receiving part 10 and the rib 12h projecting at the upper surface of the wider part 12e of the sensor holder 12, ~~and~~ ^{set} consequently, it is ~~set that~~ the sensor holder 12 is ~~incorporated~~ ^{set} in the incorporation position in the state of temporary holding.

[0030] Then, by being positioned at the incorporating position, the terminal support part 12d of the sensor holder 12 is positioned at the upper side of the circular-arc-like piece part 10a of the holder receiving part, ~~that is, the upper side in the incorporating direction of the terminal unit 19 to come into contact,~~ ^{in this position} and it is set to be positioned right under the connecting opening part O which is open in the case body 7, ~~and~~ ^{can come into contact} on the other hand, the sensor support part 12a is set to face to the ~~connecting part R~~ ^{communication} which is formed by cutting off the circular-arc-like piece part 10a of the holder receiving part. Consequently, the hall devices 14 of the sensor support part 12a are adjacently facing ^{or} to the sensor magnet 11 of the motor shaft 4 in the state of having the circular-arc-like concave part 12b of the sensor holder between them and the sensor magnet 11 of the motor shaft 4. ~~Then the hall device 14 can detect the rotational state of the sensor magnet 11.~~ ^{positioned such} (Figs. 4(A)-(C))

[0031] Furthermore, reference numeral 15 ^{denotes} a brush unit which is incorporated in the case body 7 after incorporating the sensor holder 12. ~~In the brush unit 15 has~~ ^{each having} a pair of base end parts of a plate spring 17a where a brush 17 is arranged at the tip, ~~and~~ ^{the}

brush end parts are

9

fixed on one side of a disk-like brush stay 16 ^{having} where a through hole 16a for the penetration of the motor shaft 4 ^{is open}. The brush unit 15 is fixed by screwing the attaching part 16b, formed on the outside diameter part of the brush stay 16, to the end surface of the opening part 7b of the case body 7, ^{to be} and it is set ^{so that} in the fixed state, the brush 17 ^{comes} into sliding contact with the commutator 5 of the motor shaft 4 in the state of elastically pressing.

[0032] A pair of brush terminals 17b, which feed electricity to the brush 17 ^{so one is} and are ^{each} formed integrally with the plate spring 17a are provided on the brush stay 16. These brush terminals 17b ^{are} extend ^{toward} ^{externally} ^{bottom} ^{when} ~~are extended along~~ the channel-like side of the case body 7 ^{in the state} ^{where} the brush unit 15 is incorporated in the case body 7, and the bent part 17c, ^{to be} the external connecting end part, is set to come into contact with one pair of notch-like terminal receiving parts 12j of the sensor holder 12 positioned at the previously set incorporating position in the butting state. ^{thus, when mounted} It is set that by taking the state, the brush stay attaching part 16b is butted against the end surface of the case body opening part 7b, and the normal incorporation can be performed. Therefore, in the case where the step part 12g of the sensor holder 12 is incorporated in the state of not butting against the opening side end surface of the holder receiving part circular-arc-like piece part 10a (in the state where the sensor holder 12 is not positioned at the specified incorporation position, and is positioned on ~~the channel~~ ^{on the external bottom side} ~~this side of the holder receiving part 10~~), it is set that the brush stay attaching part 16b and the end surface of the case body opening part 7b cannot come into contact with each other, even if the brush terminal bent part 17c comes into contact with the sensor holder notch part 12g. Consequently, the incorporation state of the sensor holder 12 can be confirmed by the incorporation state of the brush unit 15. And at this moment by further ~~more~~ pushing in the brush unit 15 to make the brush stay attaching part 16b come into contact with the end surface of the case body opening part 7b, the positioning of the sensor holder 12 can be performed through the brush terminal bent part 17c.

[0033] In the state where the sensor holder 12 and the brush unit 15 are incorporated in the case body 7, ^{like this, it is set that} from the connecting opening part O of the case body 7, the sensor terminal external connecting part 14b, which projects from the sensor holder terminal support part 12d and the brush terminal bent part 17c can be seen. ^{(Figs. 7(A) - 7(D))} On the other hand, a terminal unit (male coupler terminal part) 19 ^{connects} the sensor terminal external connecting part 14b and brush terminal bent part 17c to the coupler (female coupler) 18 ^(Fig. 1) on the external power source side and is attached to the connecting opening part O. The terminal unit 19 is set to compose the male coupler by being inserted from the ^{bottom} ^{upside} ^(from the outside) into the rectangular-tube-like projecting piece part 7e formed in the

the terminal unit 10
19 comprises

connecting opening part O. ~~And it is constructed by comprising~~, a terminal holder 20 which is formed approximately like a rectangular pillar shape to be inserted into the projecting piece part (male coupler outer frame) 7e in the slip-off-stopping state, and six middle terminals 21 ~~in all which~~ are incorporated in a double line to be positioned at the part facing to the sensor terminal external connecting part 14b and the brush terminal bent part 17c ~~to be~~ *that can be* seen from the connecting opening part O. Furthermore, engaging claws 20a are formed on one pair of left and right incorporating tip sides which face to each other of the terminal holder 20 and are set to be engaged with the step-like engagement receiving part 7f formed in the connecting opening part O when the terminal unit 19 is incorporated in the connecting opening part O, so that the terminal unit 19 is surely fixed to the connecting opening part O. By the way, the engagement receiving part 7f is arranged to be integrally formed by being drawn from the incorporating direction of the brush unit 15 when molding the cylindrical part of the case body 7.

[0034] ~~Then,~~ by inserting the terminal unit 19 into the connecting opening part O, the lower end part 21a of each middle terminal 21, ~~and an associated one of~~ the sensor terminal external connecting part 14b and the brush terminal bent part 17c are electrically connected. Consequently, the terminal unit 19 can be incorporated in the connecting part where the sensor terminal 14a and the brush terminal 17b are ~~put together~~ *joined*. By connecting the female coupler 18 on the vehicle body side to the male coupler which includes the terminal unit 19 and the projecting piece part 7e, the electrical connection can simultaneously be performed to both the hall device 14 and the brush 17. Furthermore, it is arranged that when the terminal unit 19 is incorporated up to the specified position, the concave step 20b formed on the peripheral surface of the terminal holder 20 comes into contact with the convex step 7g formed to the inner peripheral surface of the projecting piece part 7e to regulate any ~~more~~ *with* incorporation to the back side.

[0035] Here, the terminal unit 19 composes the male coupler in cooperation with the projecting piece part 7e. At the time of connection with the conventional type vehicle body side female coupler 18, which is arranged on the vehicle body side, the seal is ~~performed~~ *overblended* at the same time as the connection of the fellow couplers by the water proof means which is separately arranged, and the intrusion of water into the connecting opening part O at the lower part of the terminal holder 20 is prevented, ~~and the special water proof structure for the sensor holder terminal support part 12d can be made unnecessary.~~ *Thus, a* Furthermore, it is set that the sensor terminal 14a, which is disposed in the sensor holder 12, ~~is insert-molded and it has~~ *are* no looseness, but the brush terminal 17b which is disposed in the brush unit 15 ~~is~~ *are* *have*

Such that incorporated and a little looseness is allowable, and it is ~~considered to function~~^S as a play when inserting and connecting the external power source coupler 18 to the terminal unit 19.

[0036] Furthermore, by incorporating the motor yoke 3, which pivots one end part of the motor shaft 4 ~~is incorporated~~^{is incorporated} to the casing 6 in which the sensor holder 12, brush unit 15, and terminal unit 19, ~~the incorporation of the motor 1 is completed.~~^{is mounted} It should be noted that the motor yoke 3 is fixed by making the opening end part thereof butt against the attaching part outside diameter side of the brush unit 15 at the end surface of the case body opening part 7b and by performing the screwing thereof ~~there~~^{to}.

[0037] In the case of the preferred embodiment of the ~~present invention constructed~~^{structured} as mentioned above, the rotation detection of the motor shaft 4 is performed by detecting the rotation of the sensor magnet 11 which rotates integrally with the motor shaft 4 by the hall device 14. Consequently, it ~~becomes~~^{is} possible to detect the movement amount or the position of the movable member which acts on the basis the output shaft practicing the output through the reduction mechanism. Then, in the case of this one, the hall device 14 is incorporated in the sensor holder 12, and the sensor holder 12 is arranged in the inside of the case body 7, by being incorporated toward the tube bottom side (channel back side) from the opening part 7b, which is the incorporation direction of the motor shaft 4 to the holder receiving part 10 formed to the case body 7, and it ~~becomes unnecessary~~^{is} to plan a special water proof structure. Furthermore, in the case of this one, the sensor holder 12 is incorporated in the state of being lightly pressed into the holder receiving part 10, and therefore, that can temporarily be held in the case body 7 by performing the incorporation work, and it is ~~eliminated to separately use~~^{unnecessary} fixing means, ~~and the attachment work can be simplified.~~^{as a result}

[0038] On the other hand, in the case of the incorporation to the connecting opening part O of the terminal unit 19, it is surely fixed by engaging the engaging claw 20, which is formed on the incorporating tip side of the terminal holder 20, with the step-like engagement receiving part 7f which is formed in the connecting opening part O, and the water proof structure can be provided only by engaging and attaching the engaging claw 20 to the engagement receiving part 7f, and in the meantime, the incorporation workability can also be improved, which is different from the case in which an engaging hole is pierced on the case side and an engaging claw on the terminal unit side is engaged with the engaging hole as shown in the prior art.

[0039] Furthermore, the engagement receiving part 7f is set to be integrally formed by being drawn from the incorporating direction of the brush unit 15 when the cylindrical part of the case body 7 is molded, ~~and the number of parts can be reduced.~~^{thus}

[0040] Furthermore in this embodiment, the terminal support part 12d, which is formed to the sensor holder 12, faces to the connecting opening part O, which is formed in the tube peripheral surface of the case body 7, and the ^{Structure} construction is made such that the brush terminal bent part 17c of the brush unit 15 is also provided to the terminal support part 12d in addition to the sensor terminal external connecting part 14b, ^{and} therefore, it is possible to integrate the sensor terminal external connecting part 14b and the brush terminal bent part 17c by inserting the terminal unit 19 into the connecting opening part O, ^{Further,} and by connecting the coupler 18 on the external power source side to the terminal unit 19, the electrical connection can simultaneously be performed to both the hall device ¹⁴ and the brush 17. As a result of ~~this~~, it becomes unnecessary to make ~~such a construction~~ where the lead wires, each of which is separately pulled out, are collected into the extension harness like the conventional one using lead wires, and the number of parts can be reduced, ^{Structure} and in terms of the cost, a low price can also be achieved, ^{and} in addition, the automatic incorporation also ^{Makes it} becomes possible to achieve the improvement of the workability.

[0041] Furthermore, in this embodiment, even if the sensor holder 12 is incorporated in the state where it does not reach the channel depth previously set to the holder receiving part 10 and has a positional deviation, the brush terminal bent part 17c of the brush unit 15 acts to press the sensor holder 12 ^{to perfectly} up to the specified position by incorporating the brush unit 15, and the sensor holder 12 can be positioned, ^{to} and as a result of this, the bad incorporation is eliminated and the dispersion in product quality ^{is} can be reduced.

[0042] Furthermore, in the case of ~~this one~~, ^{this} the circular-arc-like piece part 10a is formed on ~~the channel back side of~~ the holder receiving part 10, ^{on the cylindrical bottom side} and when the sensor holder 12 is incorporated in the holder receiving part 10, the terminal support part 12d is positioned on the upside of the circular-arc-like piece part 10a, that is, the upper side in the incorporating direction of the terminal unit 19, ^{and comes into contact with that,} and in this state, the terminal unit 19 is incorporated in the terminal support part 12d, and therefore, the load in the incorporating direction, which is produced at the time of incorporation, is received by the circular-arc-like piece part 10a which comes into contact with the terminal support part 12d, and it does not directly act on the terminal support part 12d, ^{and} as a result of this, it avoids ^{the} for the incorporating load to act on not only the sensor holder 12 but also the base plate 13, and the accuracy of the rotation detection can be raised.

[0043] Furthermore, in the case of ~~this one~~, ^{this} even if it is formed to have a horizontally mirror image structure of the motor 1, the shape of the engagement receiving part 10 needs not be made horizontally mirror image. Therefore the common part can be used.

and therefore, it becomes possible to deal with the sensor holder 12 only by forming one kind, ^{an} ~~and~~ the common member can be used to achieve ^{by} the improvement of the quality control and to achieve ^{the} low cost.

[0044] Furthermore, in the case of the ~~one of the present~~ embodiment, it is also possible to construct a motor with a specification which requires no position detecting mechanism of the motor, only by incorporating a brush unit 15 in the casing 6 without incorporating a sensor holder 12 therein, and it becomes possible to use the common member.

~~Industrial Applicability~~

[0045] ^{Thus} Then, in the case of the ~~present~~ invention, by doing this, in the motor with a rotation detecting device, the sensor holder composing the rotation detecting device is contained in the case body by being incorporated from the incorporating direction of the rotary shaft, and on the other hand, the connection between the external pull-out terminal unit and the connecting opening part is performed by engaging the engaging claw formed on the terminal holder, with the step-like engagement receiving part formed on the connecting opening part, ^{to} ~~and~~ therefore, a simple structure ^{is} can be realized, and the number of parts ^{is} can be reduced in addition ^{to} that a water proof structure ^{is} is provided.

[0046] Furthermore, ^{because} since the incorporating load which is produced when incorporating the external pull-out terminal unit into the sensor holder is received by the circular-arc-like piece part of the holder receiving part, it ^{is} can be avoided ^{that} for the incorporating load ^{to} to act directly on the sensor holder to deform the sensor holder, which ^{is} enable ^{to} to provide ^{providing} a rotation detecting device with a high accuracy.